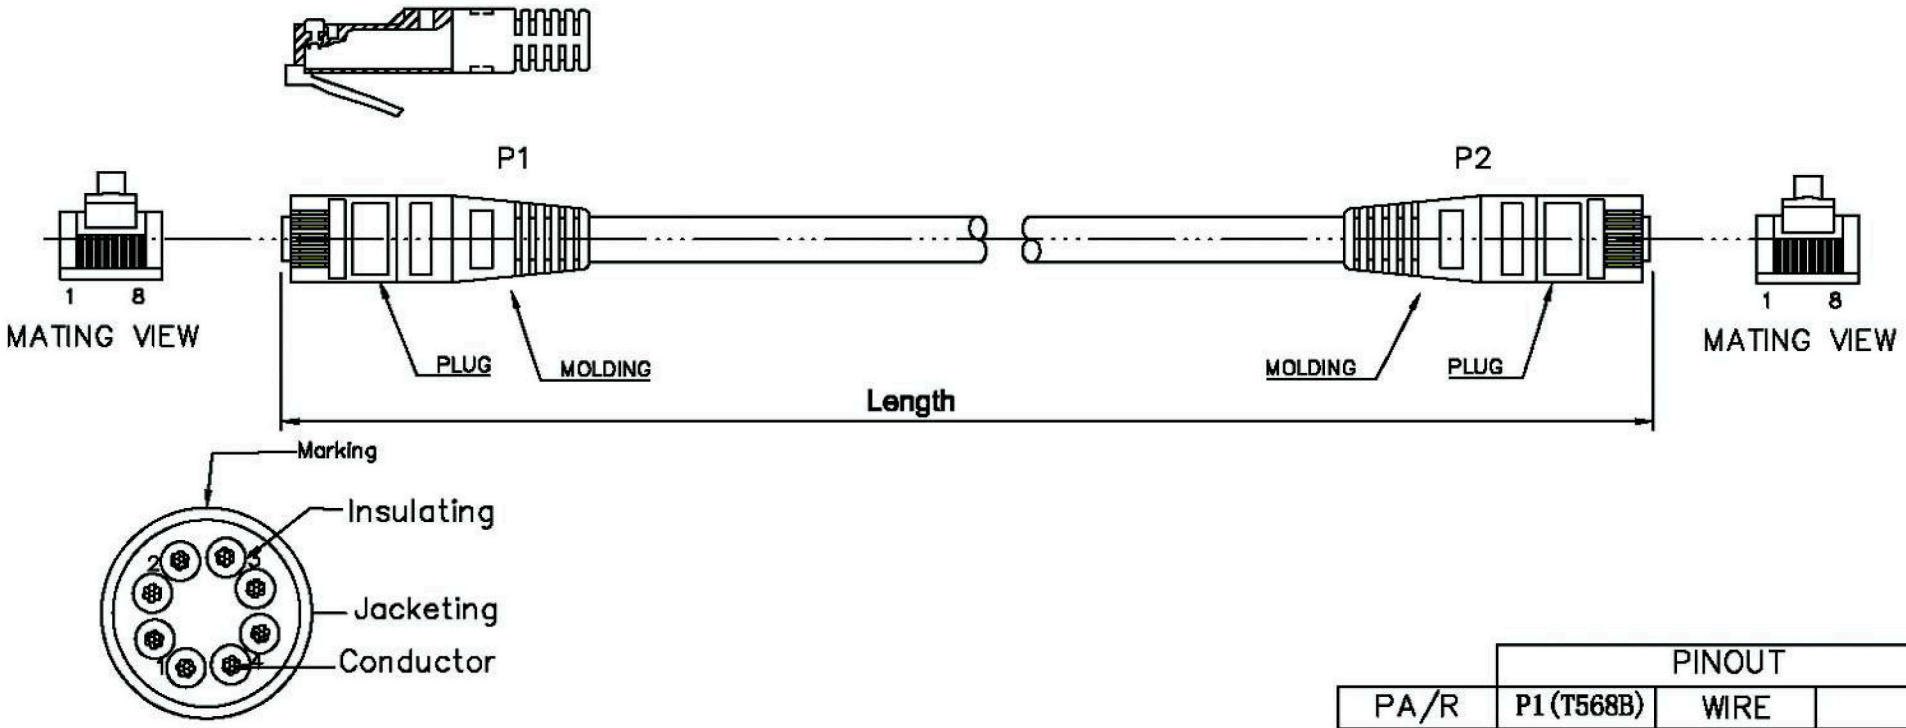

Conductor	Bare Copper 24AWG 7/0.196± 0.015mm
Insulation	Thickness:MIN at any point:0.15mm MAX AVG:0.25mm Diameter:0.98± 0.05mm
Jacketing PVC	Thickness:MIN at any points:0.42mm MAX AVG:0.48mm Diameter:5.4± 0.2mm

Wire	CAT.5E UTP STR

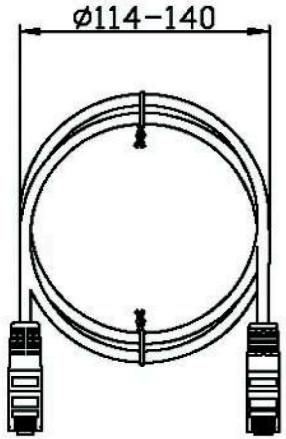

orange 1 white/orange	green 2 white/green
blue 3 white/blue	brown 4 white/brown

	PINOUT		
PA/R	P1(T568B)	WIRE	
1	1	WHT/ORG	3
	2	ORG	6
2	3	WHT/GRN	1
	6	GRN	2
3	4	BLU	7
	5	WHT/BLU	8
4	7	WHT/BRN	4
	8	BRN	5

XRT Range

Unless specified on the drawing, tolerances are per the follows:
. ± 1
.X ± 0.2
.XX ± 0.05

3RD

DRAW.NO		ITEM			
DEPARTMENT		DRAW		DATE	2005/11/18
SCALE		CHECKER		APPROVAL	
UNIT	MM	SHEET	1 OF 1		